

## Control your servers from a compact 1U rack-mount console

*Unique single-rail system offers a compact LCD console with high-quality video and laptop-style keyboard*



The Belkin LCD Rack Console enables system administrators to conveniently control racked servers from a single, secure, compact console. With its slim design, the Rack Console fits a standard 19-inch rack, ensuring clearance for the full extension of the LCD and keyboard.

Its unique single-rail system lets the LCD panel slide easily from the server rack. The Rack Console offers other advanced features such as a key-locking mechanism to prevent unauthorized access, and cable-management arms that organize console cables as the drawer extends and retracts. Available in 15- and 17-inch color displays, or 17-inch LCD Rack Consoles with Built-In KVM Switch. The LCD Rack Consoles are excellent solutions for server administrators.

### Benefits


#### Rack Console

- Features grade-A, 15" or 17" LCD, TFT, active-matrix color panel for high-quality images, especially for viewing multiple applications
- Delivers 1024x768@65Hz or 1280x1024@65Hz resolution for best visual performance
- Features a 1U single-rail design to enhance sliding performance and save rack space
- Integrates compact 106-key function keyboard, including numeric 10-key pad with centrally located touch pad for optimal ergonomics
- Features adjustable brackets for broadest rack compatibility and ease of installation

#### Rack Console with Built-In KVM Switch

- Available in 17" LCD TFT, active-matrix color panel for best visual performance
- Belkin PRO3 technology supports a combination of PS/2 and USB servers
- Graphical On-Screen Display (OSD) allows easy access to your servers
- Daisy-chain capability allows you to control up to 256 servers with Belkin PRO3 KVM Switches

1U Rack Console

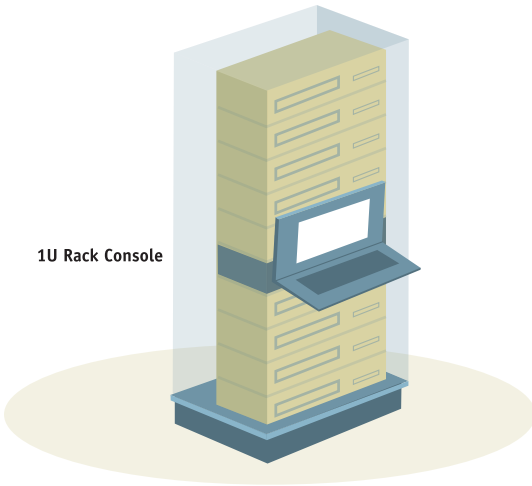

### Check out these Belkin KVM products to go with your Rack Console:

### Perfect addition to your Rack Consoles with Built-In PRO3 KVM



OmniView® SMB Remote IP Device (F1DP101M)  
Adds IP control to your KVM switch



OmniView PRO3 USB & PS/2 KVM Switch  
4-Port Switch (F1DA104Z)  
8-Port Switch (F1DA108Z)  
16-Port Switch (F1DA116Z)  
Daisy-chain to add KVM ports to your console

### Consider the following KVM products from Belkin for your Rack Console:



OmniView SMB KVM-over-IP Switch  
8-Port Switch (F1DP108G)  
16-Port Switch (F1DP116G)



OmniView SMB CAT5 KVM Switch  
4-Port Switch (F1DP104A)  
8-Port Switch (F1DP108A)  
16-Port Switch (F1DP116A)

### Package Contents

#### Rack Console

- 15" or 17" LCD Rack Console
- Power Cable
- VGA, PS/2 Cable Kit
- Bracket Kit
- Console Screws
- Quick Installation Guide

#### Rack Console

- 17" LCD Rack Console with Built-In KVM Switch
- Flash Cable
- Bracket Kit
- Console Screws
- Quick Installation Guide & Manual

### Product Specifications

Part Number:	F1DC100P-SR	F1DC101P-SR	F1DC108B-SR	F1DC116B-SR
Enclosure:	Heavy-duty steel	Heavy-duty steel	Heavy-duty steel	Heavy-duty steel
Power:	Auto-switching 100 to 240VAC 50 to 60Hz 48 watts	Auto-switching 100 to 240VAC 50 to 60Hz 48 watts	External power brick	External power brick
Dimensions:	19 (W) x 21.7 (D) x 1.70 (H) in. (482.6 x 551.2 x 43.18mm)	19 (W) x 21.7 (D) x 1.70 (H) in. (482.6 x 551.2 x 43.18mm)	19 (W) x 23.5 (D) x 1.75 (H) in. (482.6 x 597 x 44.5mm)	19 (W) x 23.5 (D) x 1.75 (H) in. (482.6 x 597 x 44.5mm)
Weight:	22.4 lbs. (10.16kg.)	26.9 lbs. (12.2kg.)	33.0 lbs. (15.0kg.)	34.1 lbs. (15.5 kg.)

### Console Specifications

Display Type:	15 in. LCD active-matrix color	17 in. LCD active-matrix color	17 in. LCD active-matrix color	17 in. LCD active-matrix color
Resolution:	Up to 1024x768	Up to 1280x1024	Up to 1280x1024	Up to 1280x1024
Contrast Ratio:	400:1	450:1	450:1	450:1
Brightness:	250 cd/m2 typical	250 cd/m2 typical	250 cd/m2 typical	250 cd/m2 typical
Pixel Pitch:	0.297mm x 0.297mm	0.264mm x 0.264mm	0.264mm x 0.264mm	0.264mm x 0.264mm
Panel Color:	16.0 million display colors	16.7 million display colors	16.7 million display colors	16.7 million display colors
Viewing Angle:	115 degrees	115 degrees	115 degrees	115 degrees
Response Time:	Rising 5ms, decay 11ms	Rising 2ms, decay 14ms	Rising 2ms, decay 14ms	Rising 2ms, decay 14ms
Keyboard/Mouse Type:	Laptop-style, integrated, high-quality keyboard with touch pad	Laptop-style, integrated, high-quality keyboard with touch pad	Laptop-style, integrated, high-quality keyboard with touch pad	Laptop-style, integrated, high-quality keyboard with touch pad
Operating Life of Individual Keys:	8 million cycles	8 million cycles	8 million cycles	8 million cycles

### CPU/Other KVM Specifications

CPU/CPU/KVM Ports:	1	1	8	16
CPU/KVM Video Connection:	VGA	VGA	VGA	VGA
CPU/KVM Keyboard/Mouse Connection:	PS/2	PS/2	PS/2, USB	PS/2, USB

### Warranty

2 years

Note: Specifications are subject to change without notice.

## Part Number

F1DC100P-SR  
F1DC101P-SR  
F1DC108B-SR  
F1DC116B-SR

## Description

15" LCD Rack Console  
17" LCD Rack Console  
LCD Rack Console with Built-In 8-port KVM  
LCD Rack Console with Built-In 16-port KVM

## UPC

7-22868-65932-8  
7-22868-65931-1  
7-22868-65934-2  
7-22868-65933-5