



Secure KVM Switch



## Protect secure computers with a NIAP-certified, TAA-compliant USB KVM switch

Designed specifically for secure military and government installations, the OmniView Secure KVM Switch lets you control multiple USB computers from a single console. This product ensures the integrity of your data by safely switching among computers running different security levels. The OmniView Secure KVM Switch is NIAP Common Criteria validated to EAL 4.\*



The OmniView Secure KVM Switch is made in the USA and is TAA-compliant.

### Back View

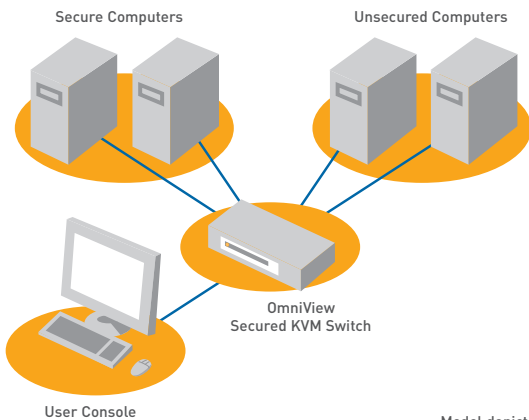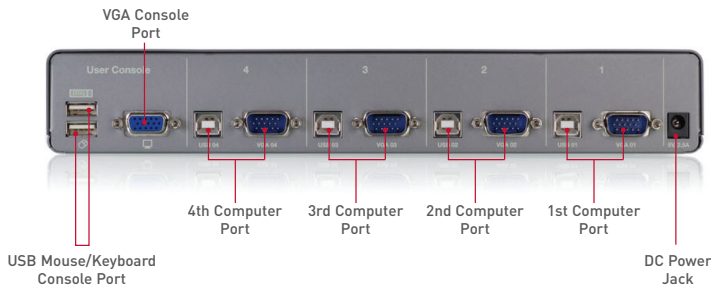

Model depicted above is F1DN104U.



### Belkin Security Features:

- **Dedicated processor per computer port** – Keeps secure and unsecured computers separated; protects data and prevents data transfer among computers
- **No memory buffer** – Prevents unintentional transfer of keystrokes or other data when switching between computers
- **Non-reprogrammable firmware** – Prevents tampering with KVM logic
- **Circuits soldered directly to circuit board** – Prevents tampering with components
- **Tamper-evident tape on enclosure** – Indicates that KVM Switch has been compromised; assures security when intact

### Other Features

- Rugged, metal enclosure for stability
- Compact design for desktop or 1U rack-mountable installation

\*This product is certified by the National Information Assurance Partnership (NIAP). It is validated in accordance with the provisions of the NIAP Common Criteria Evaluation and Validation Scheme to EAL 4 (Evaluation Assurance Level 4).

## Product Specifications

Model No.	F1DN102U	F1DN104U	F1DN108U
No. of Users Supported	1	1	1
No. of Computers Supported	2	4	8
Dimensions	11 (W) x 1.75 (H) x 6 (L) in.	11 (W) x 1.75 (H) x 6 (L) in.	17 (W) x 1.75 (H) x 7.5 (L) in.
Weight	2.5 lbs. (1.1kg.)	2.5 lbs. (1.1kg.)	4.25 lbs. (1.9kg.)
Enclosure	Metal with plastic faceplate		
<b>Specifications</b>			
Keyboard/Mouse Ports	USB	USB	USB
Monitor Supported	CRT and LCD (with VGA support)	CRT and LCD (with VGA support)	CRT and LCD (with VGA support)
Max Resolution	Up to 1920x1440 @ 75Hz	Up to 1920x1440 @ 75Hz	Up to 1920x1440 @ 75Hz
Direct Port Selectors	2	4	8
LED Indicators	2	4	8
<b>Power/Environment</b>			
Power Requirements	5V DC, 2.6A		
Operating Temperature	32° to 104° F (0 to 40° C)		
Storage Temperature	-20° to 140° F (-20 to 60° C)		
<b>Warranty</b>			
3 years			

Note: Specifications are subject to change without notice.

### Package Contents

- OmniView Secure KVM Switch
- 5V DC, 3A Power Adapter
- User Manual
- Quick Installation Guide

### Secure KVM Cables

- One Cable Kit is required per connected computer.
- Available in lengths of 6, 10, and 15 feet.

F3X1962b06  
F3X1962b10  
F3X1962b15



### Rack-Mount Kit for 2- and 4-Port Models\*\*



F1D005

\*\*8-port models ship with rack-mount brackets.

Part Number	Description	UPC
F1DN102U	OmniView Secure 2-Port KVM Switch	7-22868-60080-1
F1DN104U	OmniView Secure 4-Port KVM Switch	7-22868-60081-8
F1DN108U	OmniView Secure 8-Port KVM Switch	7-22868-60082-5

This product is TAA Trade Compliant.