


Dual-Rail LCD Console



Access your servers with a compact 1U LCD Console with Dual-Rail Technology

Designed for easy access and server monitoring, the OmniView LCD Rack Console is the perfect solution for saving space in the server room. The Console features Dual-Rail Technology and integrated 8- and 16-port KVM switches*. With independently sliding rails, it allows the high-grade LCD monitor to remain displayed, even with the laptop-style keyboard/mouse tray stored. With its slim 1U design, the OmniView LCD Rack Console fits any standard 19-inch, 4-post rack. The LCD Rack Console offers an affordable solution with Belkin reliability, quality, and support.

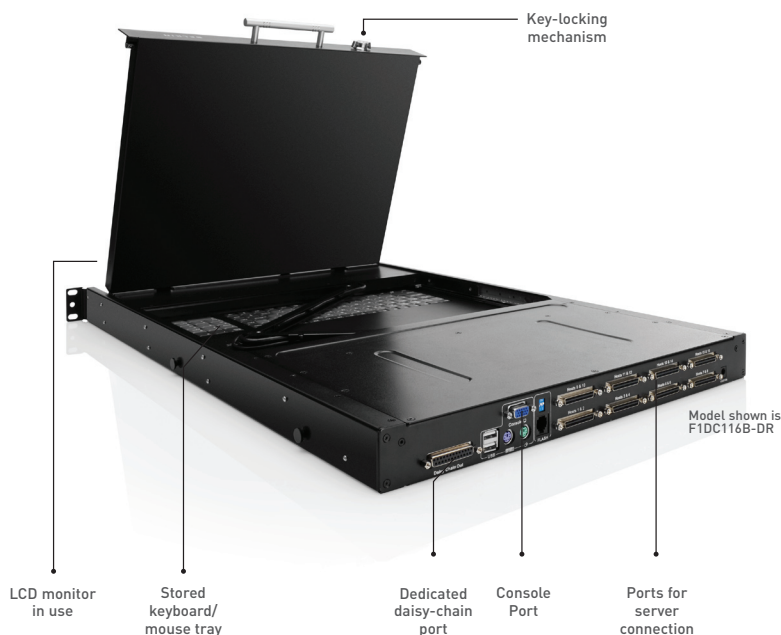

Dual-Rail LCD Rack Console features:

- Constant monitoring while saving space with dual glide rails for independent console and keyboard-drawer storage
- Integrated 8- and 16-port KVM switches stay consistent with 1U design*
- Includes a key-locking mechanism to prevent unauthorized access to console or servers
- Provides up to 115-degree monitor rotation for greater viewing flexibility
- Features grade-A, 17" LCD TFT, active-matrix color panel for high-quality images, especially for viewing multiple applications
- Built-in adjustable brackets for broadest rack compatibility and ease of installation
- Comes with a Belkin 2-Year Warranty

*Integrated KVM switch on models F1DC108B-DR and F1DC116B-DR

Package Contents

- OmniView Dual-Rail LCD Rack Console
- Bracket Kit
- Keys
- Quick Installation Guide
- User Manual**
- DB9-to-RJ11 Serial Flash Cable**
- 12V DC, 6A Power Supply**

**Included in F1DC108B-DR and F1DC116B-DR

Product Specifications

| Model No. | F1DC100P-DR | F1DC101P-DR | F1DC108B-DR | F1DC116B-DR |
|--|--|--|---|---|
| Rail Type | Dual-Rail Technology | Dual-Rail Technology | Dual-Rail Technology | Dual-Rail Technology |
| Material/Enclosure | Heavy-duty steel | Heavy-duty steel | Heavy-duty steel | Heavy-duty steel |
| Built-In KVM Switch | No | No | Yes | Yes |
| Weight | 30.6 lbs. (13.9kg.) | 32.6 lbs. (14.8kg.) | 33.3 lbs. (15.1kg.) | 36.1 lbs. (16.4kg.) |
| Dimensions | 26.1 x 17.6 x 1.74 in. (673mm x 448mm x 44.1mm) | 26.1 x 17.6 x 1.74 in. (673mm x 448mm x 44.1mm) | 26.1 x 17.6 x 1.74 in. (673mm x 448mm x 44.1mm) | 26.1 x 17.6 x 1.74 in. (673mm x 448mm x 44.1mm) |
| Specifications | | | | |
| KVM Switch | N/A | N/A | 8 ports | 16 ports |
| Users | 1 | 1 | 1 | 1 |
| Keyboard Type | Laptop style | Laptop style | Laptop style | Laptop style |
| Keyboard Connection | PS/2 | PS/2 | PS/2, USB | PS/2, USB |
| Operating Life of Individual Keys | 8 million cycles | 8 million cycles | 8 million cycles | 8 million cycles |
| Mouse Type | Touchpad style | Touchpad style | Touchpad style | Touchpad style |
| Mouse Connection | PS/2 | PS/2 | PS/2, USB | PS/2, USB |
| Power/Environment | | | | |
| Power | Auto-switching 100 to 240VAC 50 to 60Hz 48-watt | Auto-switching 100 to 240VAC 50 to 60Hz 48-watt | 12V DC, 6A power adapter, center-pin-positive polarity | 12V DC, 6A power adapter, center-pin-positive polarity |
| Operating Temperature | 32° to 104° F (0° to 40° C) | 32° to 104° F (0° to 40° C) | 32° to 104° F (0° to 40° C) | 32° to 104° F (0° to 40° C) |
| Storage Temperature | -4° to 140° F (-20° to 60° C) | -4° to 140° F (-20° to 60° C) | -4° to 140° F (-20° to 60° C) | -4° to 140° F (-20° to 60° C) |
| Humidity | 0-80% RH, non-condensing | 0-80% RH, non-condensing | 0-80% RH, non-condensing | 0-80% RH, non-condensing |

Note: Specifications are subject to change without notice.

Part Number

F1DC100P-DR
F1DC101P-DR
F1DC108B-DR
F1DC116B-DR

Description

15" Dual-Rail LCD Rack Console
17" Dual-Rail LCD Rack Console
17" Dual-Rail LCD Console with Built-In 8-Port KVM Switch
17" Dual-Rail LCD Console with Built-In 16-Port KVM Switch

UPC

7-22868-65926-7
7-22868-65935-9
7-22868-67216-7
7-22868-65927-4