


Convert your serial platform to VGA and PS/2, or Sun™ video and Sun keyboard

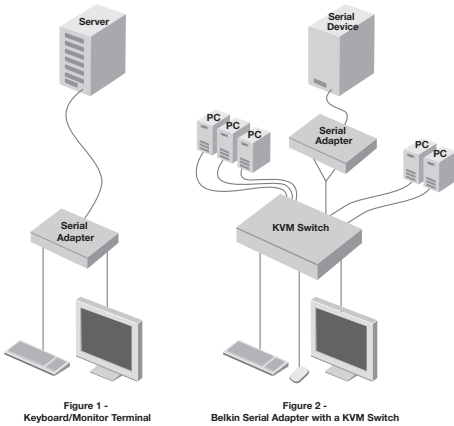

The Belkin OmniView Serial Adapter is designed to emulate an “ASCII terminal,” converting RS232 serial ASCII terminal data to “PS/2 keyboard and VGA video” or “Sun keyboard and Sun video”. This conversion allows any devices that can be accessed by an ASCII terminal to be operated using a PC or Sun console.

The Adapter features a circular buffer to track the previous commands. Buffer editing mode and 12 programmable keys offer the flexibility to edit and copy computer functions as well as program frequently used strings into the press of a key. The Adapter is ideal to go along with a Belkin KVM Switch for convenient access to multiple ASCII devices.

Features

- Maintains 8 pages of data in a circular buffer
- Buffer Edit Mode – edit, copy (mark), and resend to computer functions
- Online Mode – operate an ASCII device as if attached to a text terminal
- 12 programmable keys for frequently performed character string commands
- Use PS/2 console-PS/2 keyboard and VGA monitor, or Sun™ console-Sun keyboard and composite sync Sun monitor (auto-sensing)
- Use with a Belkin KVM Switch for convenient access to multiple ASCII devices



Diagnose Port ASCII Terminal Port



Status LED Video Power
PS/2 Keyboard Sun Keyboard

Specifications

Part Number: F1D084Eea
 Power Adapter: 6V 1.4A
 Input Port: D25 (F)
 Output Port: DB9 (M)
 Maximum Baud Rate: 19,200
 Dimensions: 4.3" (W) x 3.6" (D) x 1.0" (H) (108 x 91 x 23mm)
 Weight: 0.7 lbs. (0.3kg.)
 Operating Temp: 32° F to 104° F (0° C to 40° C)
 Storage Temp: 32° F to 122° F (0° C to 50° C)
 Humidity: 20%–80%



BELKIN®

OmniView® Serial Adapter

