


# Hi-Speed USB 2.0 and FireWire PCI Card

## Combine the Power of FireWire technology and USB in one PCI card

This PCI Card gives your computer a bandwidth up to 40 times greater than USB 1.1 with three USB 2.0 ports (2 external, 1 internal) and three FireWire® ports (2 external, 1 internal). It's the ideal interface for transferring extremely large files from USB 2.0 and FireWire peripherals at ultrafast speeds. Maximising the capabilities of the latest real-time video cameras, scanners, and portable drives, the Hi-Speed USB 2.0 and FireWire® PCI Card gets you the best results from a whole new class of ultrafast devices.

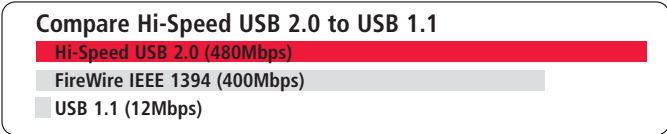


### Benefits:

- 3 FireWire® 400Mbps ports (2 external, 1 internal)
- 3 Hi-Speed USB 2.0 480Mbps ports (2 external, 1 internal)
- Hi-Speed USB 2.0 bandwidth 40 times greater than USB 1.1
- Plug-and-Play Installation
- Compatibility with USB 1.1 and any FireWire peripheral
- Manufacturers Lifetime Warranty

### Compliance:

- Hi-Speed USB 2.0
- OHCI
- FCC for home and office
- CE emissions and immunity standards
- C-Tick

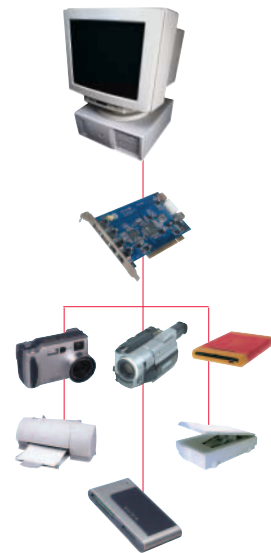

Part Number	Description	UPC
F5U508ea	Hi-Speed USB 2.0 and FireWire PCI Card	7-22868-46210-2



USB 2.0

## Hi-Speed USB 2.0 and FireWire PCI Card

### Product Specifications:

#### Recommended System Requirements:

266MHz Pentium® II processor  
Windows® 98 SE, 2000, Me, or XP  
32MB RAM  
Available PCI Version 2.1 slot

#### Ulead® VideoStudio® 5.0 - Recommended System Requirements:

Windows® 98, 98 SE, 2000, Me, or XP  
300MHz Pentium® II processor, (500MHz Pentium® III recommended)  
64MB RAM (128MB recommended)  
300MB of available hard disk space (4GB recommended)  
CD or DVD drive  
Mouse or other Windows pointing device

#### Package Includes:

Hi-Speed USB 2.0 and FireWire PCI Card  
FireWire Cable (6-Pin to 4-Pin)  
Photo Organiser, Video Editing and Network Software  
Driver CD  
User Manual

#### Ulead Photo Express My Custom Edition™ - Recommended System Requirements - Ulead Cool 360™

Windows® 95 OSR2, 98, Me, 2000, NT® 4.0 with SP4 or above  
Pentium® 166MHz or above processor  
32MB RAM, 70MB available hard disk space  
Microsoft® Internet Explorer 5 or above  
True-colour or high-colour display and monitor  
Mouse or pressure-sensitive graphics tablet compatible with WinTab™

#### Ulead Cool 360™ - Recommended System Requirements:

Windows® 98 or NT 4.0  
Pentium® processor  
32MB RAM  
20MB of available hard disk space  
800x600 or higher pixels desktop area  
True-colour or high-colour display adapter and monitor  
Windows pointing device



Belkin Corporation  
+1 310 898 1100  
Compton • CA •  
USA

Belkin Components Ltd.  
+44 (0) 1933 35 2000  
Rushden •  
United Kingdom

Belkin Components B.V.  
+31 (0) 20 654 7300  
Schiphol-Rijk •  
The Netherlands

Belkin GmbH  
+49 (0) 89 143405 0  
München •  
Germany

© 2003 Belkin Corporation. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.