



BELKIN®

**OmniView PRO3 Series
4-, 8-, and 16-port KVM Switches**



Control up to 256 computers with one keyboard, Monitor, and Mouse.

The new PRO3 Series KVM Switch from Belkin delivers reliability, performance, advanced features, and centralized control necessary for today's SMB environment. Offering both PS2 and USB support, this KVM switch enables a System Administrator to control multiple platform CPUs from a single PS/2 or USB console. With our proprietary advanced video technology, the PRO3 delivers resolutions of up to 2048x1536@85Hz, designed to preserve image integrity.

The new PRO3 KVM Switches from Belkin are designed with the advanced features necessary for managing SMB server environments. A built-in flash feature allows you to download firmware updates, ensuring compatibility with the latest servers and devices. Through a simple RJ11 interface, downloads are quick, easy, and reduce your server downtime. An elegant Multi-lingual user interface with active port LEDs and front panel push buttons allows for easy manual switching. A seven-segment display is used to indicate bank number when units are daisy-chained together. An enhanced On-Screen-Display (OSD) allows administrators to name and select computers, for fast and easy port identification and selection from your keyboard. Other features include: OSD Security and user access list per port; designated daisy-chain ports; fast hot key switching with 9 hot-key options; user-defined auto scan; native rack-mount enclosure; Backwards compatible with existing PRO2, SMB CAT5 and KVM-over-IP Series; and Belkin Three-Year Warranty.

Features	Benefits
OSD Security and user access list (per port)	Prevents unauthorized access to KVM switch and servers with multilevel security.
Reduces wiring clutter	Uses Dual-port Micro-cabling KVM Cables
OSD Hotkey configuration	Enables instantaneouse selection of desired ports and servers with 9 user-definable hot keys.
Dedicated Daisy chain ports	Easily expands your KVM configuration by daisy chaining up to 16 KVM switches together
Backwards compatible	Offers compatibility with OmniView PRO2, SMB CAT5 and KVM-over-IP switches, so you can leverage your existing investment in Belkin KVM Products.

Features

- 4-, 8-, or 16-port models available
- Supports PS/2 and USB platforms
- Flash Upgradeable
- 2048x1536@85Hz video resolution
- Elegant User Interface with direct-access port selector buttons
- Hot key switching
- User-defined auto scan
- Multi-lingual On-Screen Display (8 languages)
- Natively rack mountable and stackable
- Uses Micro-cabling KVM cables
- PS/2 keyboard and mouse emulations



F1DA104Zea



F1DA106Zea



F1DA116Zea


Specifications

Model No.	F1DA104Zea, F1DA108Zea, F1DA116Zea
Enclosure:	Metal enclosure with high-impact plastic faceplate
Power:	12V DC, 1A AC switching power adapter
Daisy-Chain:	Maximum of 16 OmniView KVM switches
No. of Servers Supported:	4, 8, 16 respectively for 4-port, 8-port and 16-port models—(256 servers max. via daisy-chaining)
Monitors Supported:	CRT and LCD (with VGA support)
Resolution Support:	Up to 1920x1440@75Hz
Keyboard input:	PS/2 (miniDIN6) & USB (Type A) with 101-/102-/104-key keyboards
Mouse input:	PS/2 (miniDIN6) & USB (Type A) having 2, 3, 4, or 5 buttons
Monitor Port:	HDDDB15 female (VGA)
CPU Ports:	SCSI-50
Daisy-Chain Ports:	DB25 female
Flash-Upgrade Port:	RJ11
Direct Port Selectors:	4, 8, 16 respectively for 4-port, 8-port, and 16-port models
Operating Temp:	32° to 104° F (0~40° C)
Storage Temp:	-4° to 140° F (-20~60° C)
Humidity:	0-80% RH, non-condensing
Dimensions:	(F1DA104Zea) 11 x 1.75 x 6 in. (279mm x 44.5mm x 150mm) (F1DA108Zea) 17.25 x 1.75 x 7.5 in. (438mm x 44.5mm x 190mm) (F1DA116Zea) 17.25 x 3.5 x 7.5 in. (438mm x 89mm x 190mm)
Weight:	(F1DA104Zea) 5.3 lbs. (2.4kg.) (F1DA108Zea) 9.2 lbs. (4.2kg.) (F1DA116Zea) 12.0 lbs. (5.5kg.)
Warranty:	
3 years	

Package Contents

- OmniView PRO3 KVM Switch
- Adjustable Rack-Mount Brackets with Screws (8- and 16-port models)
- 12V DC, 1A Power Adapter
- DB9-to-RJ11 Serial Flash-Upgrade Cable
- User Manual
- Quick Installation Guide.

Note: Specifications are subject to change without notice.

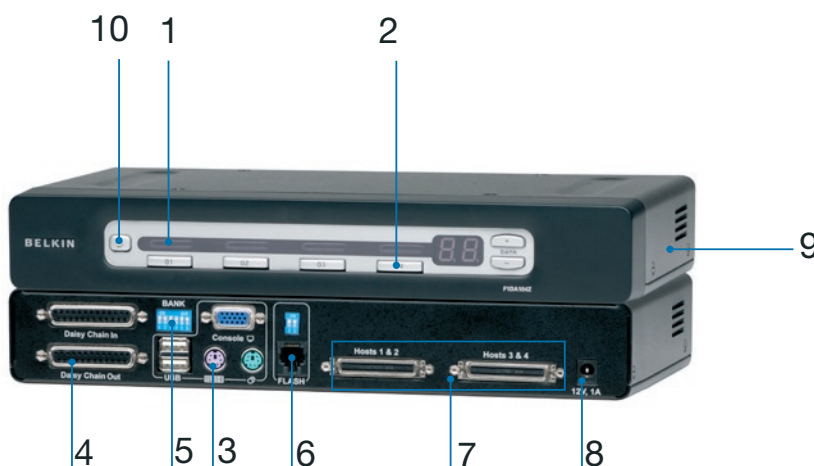

1. LED indicators
2. Dedicated port selectors
3. Console ports USB, PS/2 and VGA
4. Dedicated daisy-chain ports
5. Bank select DIP switch
6. Flash-upgrade port and DIP select switch
7. Server connections using micro cabling
8. DC power jack
9. Desktop or rack installation
10. Autoscan button

Systems Supported:

Windows® NT®, 95, 98, 2000, Me, XP, Server 2003 or Vista™, Novell® NetWare® 5.x, Microsoft® DOS 5.X and above, Red Hat® Linux® 8.x and above, Mac® OS® X and above (with USB support), SUN™ Solaris™ 8.x and above.

Recommended Belkin Products:




Belkin All-In-One USB KVM Micro Cable Kit

Offers the highest quality possible to ensure optimal data and video transmission. One Cable Kit is required per two connected computer. Available in PS/2 and USB and in 6-, 10-, and 15-foot lengths. (F1D9400-XX (PS/2), F1D9401-XX (USB)) (XX = cable length in feet)



Belkin Daisy-Chain Cable

Enables you to Daisy-chain your PRO3 Series KVM to the Belkin KVM-over-IP (F1DP1xxGea), SMB CAT5 (F1DP1XXAea), PRO2 (F1DA1xxTea) or PRO2 PS/2 Series (F1DA1xxPea) (F1D108-CBL)

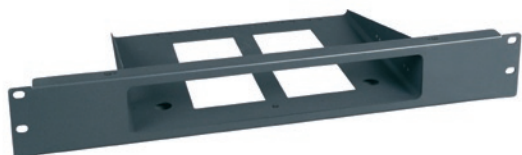

Rack-Mount Kit

Mounts your OmniView PRO3 4-port KVM Switch to any 19-inch server rack (F1D005)

Part number

F1DA104Zea
F1DA108Zea
F1DA116Zea

Description

OmniView PRO3 4-PORT KVM SWITCH
OmniView PRO3 8-PORT KVM SWITCH
OmniView PRO3 16-PORT KVM SWITCH

UPC

722868637722
722868637739
722868637746

BELKIN®

www.belkin.com

Belkin Ltd.
Rushden
United Kingdom
+44 (0) 1933 35 2000
+44 (0) 1933 31 2000 fax

Belkin BV
Schiphol-Rijk
Netherlands
+31 (0) 20 654 7300
+31 (0) 20 654 7349 fax

Belkin GmbH
Munich
Germany
+49 (0) 89 143405 0
+49 (0) 89 143405 100 fax

Belkin SAS
Boulogne-Billancourt
France
+33 (0) 1 41 03 14 40
+33 (0) 1 41 31 01 72 fax

Belkin Iberia
Madrid
Spain
+34 91 791 23 00
+34 91 490 23 35 fax

Belkin Italy & Greece
Milano
Italy
+39 02 862 719
+39 02 862 719 fax