



## CONNECTOR CONFIGURATION


Please refer to Fig. 1.1 for the location of the main connectors.

### 2.1 USB Connector

There are five USB ports that you can use for your extend devices.

CN1/ CN2 are two external USB ports on rear panel, CN3 is an internal port.

And JP1 is a 2x5-pin connector, which can supply 2 additional ports on front panel. The pin definition of JP1 is as Fig. 2.2:

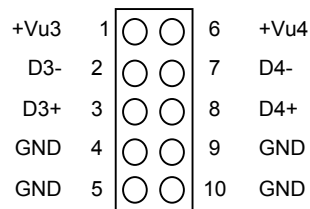


**Fig. 2.2**

### 2.2 IEEE 1394 Connector


J1/J2 are two external IEEE 1394 ports on rear panel for extend devices.

Alternatively, you can choose the MCD1. MCD1 is a 2x8 pin male connector, which can supply 2 external IEEE 1394 ports on front panel.

The pin definition of MCD 1 is shown as below:

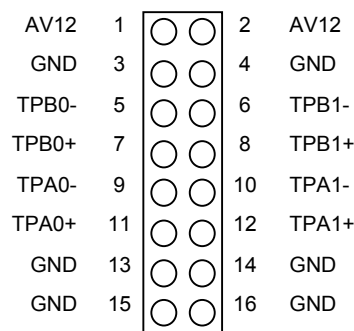

**Fig. 2.3**

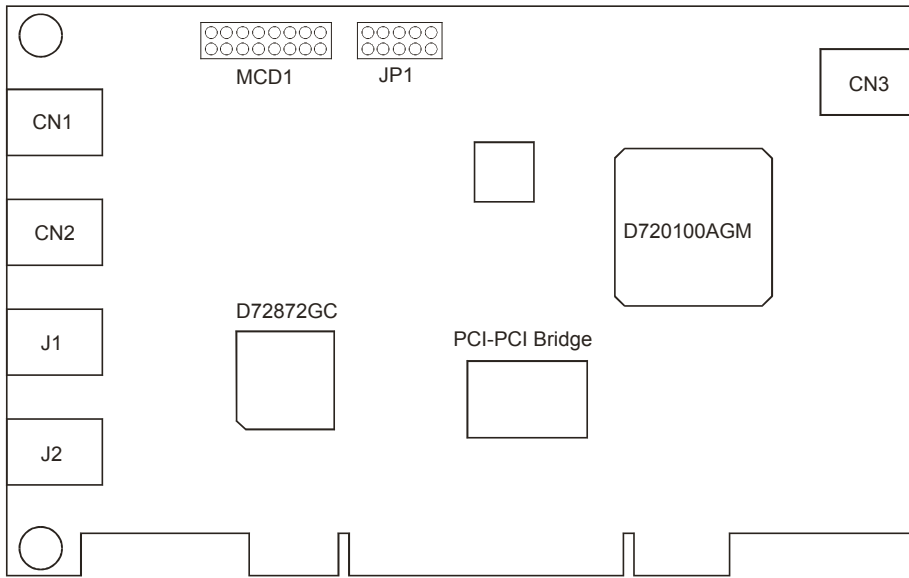

**Fig. 1.1 Key Components of PTI-213C**